


THIS DOCUMENT PROVIDES INFORMATION ON HOW TO PROPERLY INSTALL THE VEHICLE DETECTION LOOP AT THE WINDOW TO ENSURE THE PROPER OPERATION OF THE FAST TRACK DRIVE-THRU TIMER. THE CONDUIT INSTALLATION WITHIN THE BUILDING PROVIDES PROTECTION FOR THE VEHICLE DETECTION CABLING AND CONNECTIONS, ALLOWS FOR A NEATER INSTALLATION AND ELIMINATES THE NEED FOR WIREMOLD AND EXTERNAL BOXES.



CORRECT POSITIONING OF THE LOOP IS CRITICAL FOR THE TIMER SYSTEM TO OPERATE PROPERLY. THE LOOP DETECTS THE METAL IN THE ENGINE BLOCK OF THE VEHICLES.

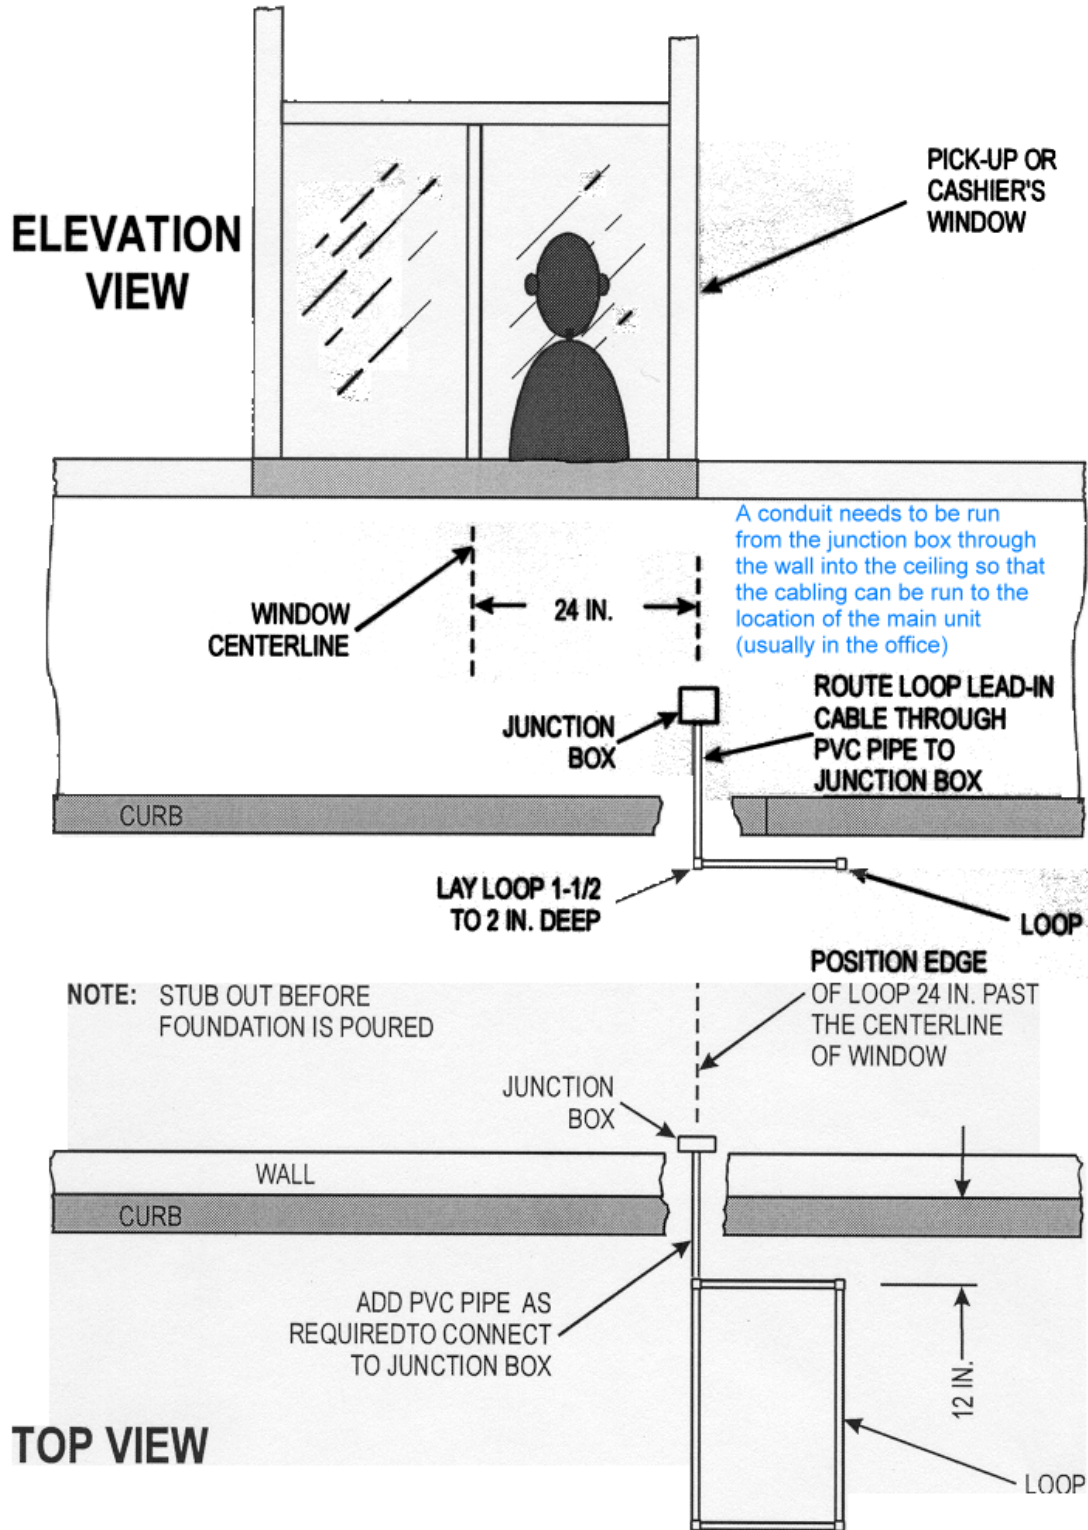

IF YOU HAVE QUESTIONS ABOUT THE LOOP INSTALLATION, CALL ESS AT 615-259-3671.

**Figure 5-1. Installing Factory Prefabricated Loops**